## Gutter LT


ANSI/SPRI GD-1 CERTIFIED:

#### .040" Aluminum

- $\overline{G-1 \text{ Horizontal}} = 310 \text{ psf}$
- G-2 Vertical = 40 psf
- G-3 Static = 430 psf

#### 24GA Steel

- $\overline{G-1 \text{ Horizontal}} = 290 \text{ psf}$
- G-2 Vertical = 20 psf
- G-3 Static = 430 psf

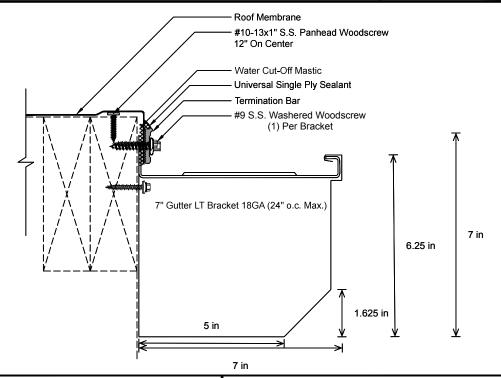

- Gutter Bracket and Fasteners provided.
- Term Bar and fasteners NOT provided.

## PRINT APPROVAL

Architect and/or Contractor shall verify all dimensions, sizes, and quantities, All products to be installed in strict accordance with Drexel's printed instructions.

Approved By:

Date:

# **OUANTITIES:**

Lineal Feet (20'-0" Lengths\*):

Outside Miters\*\*:

Inside Miters\*\*: Right End Caps\*\*:

Left End Caps\*\*:

- \* Continuous Lengths Available Onsite
- \*\* Standard riveted

### PROJECT:

ARCHITECT:

**ROOFING CONTRACTOR:** 

**REPRESENTATIVE:** 



Toll Free 888-265-4330 Fax 731-265-4309 342 Bellvue St Jackson, TN 38301 www.reelfootmetal.com

3 # A =		T A T
	lacksquare	1 A 1 -

☐ 24GA ☐ .040" AL

Other:

Finish: Color:

Effective Date: 9-22-14

Drawn By: J.S.

Approved By: B.P.